


Overview




- | | |
|---|---|
| 1. Dual-microphone array | 17. Integrated Smart Card Reader |
| 2. Volume mute button with LED indicator | 18. Optional optical drive or weight saver* (see below for left view of a 2.5" HDD configuration) |
| 3. Volume down button with LED indicator | 19. USB 2.0 Port (powered) |
| 4. Volume up button with LED indicator | 20. RJ-11/modem port |
| 5. Pointstick | 21. Power connector |
| 6. Pointstick buttons (2) | 22. Power button with LED indicator |
| 7. Optional HP Fingerprint Sensor | 23. HP QuickLook 3 button with LED indicator |
| 8. Display release button | 24. HP QuickWeb button with LED indicator |
| 9. Business Card slot (for use with Business Card Reader) | 25. Wireless on/off button with LED indicator |
| 10. Touchpad buttons (2) | 26. Ambient Light Sensor |
| 11. Touchpad with scroll zone | 27. Touchpad on/off button |
| 12. Speakers | 28. Two WWAN antennas |
| 13. Drive activity / HP 3D DriveGuard LED indicator | 29. Two WLAN antennas |
| 14. Battery charging LED indicator | 30. Webcam LED indicator |
| 15. Power/standby LED indicator | 31. Optional 2 MP Webcam |
| 16. Wireless on/off LED indicator | 32. HP Night Light with on/off button |

* Optional optical drive and weight saver are only available with the low voltage processor.

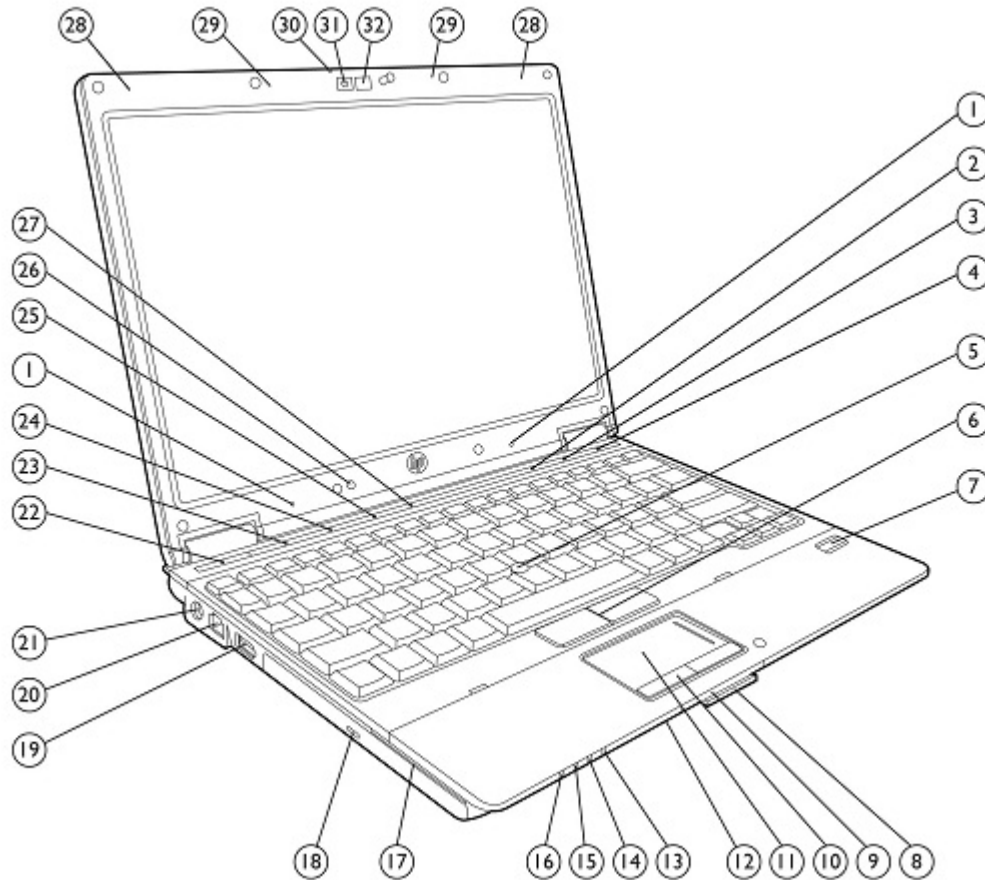



Overview

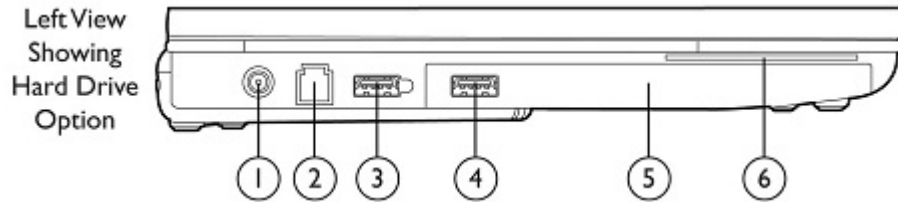

- | | |
|---------------------------|---|
| 1. Power connector | 4. USB 2.0 port (not present with weight saver) |
| 2. RJ-11/modem port | 5. 2.5-inch internal storage bay* |
| 3. USB 2.0 port (powered) | 6. Integrated Smart Card Reader |


* With a standard voltage processor, this 2.5-inch bay is used for any available 2.5-inch hard drive or solid state drive; 1.8-inch hard drive bay is not available.

With the low voltage processor and 1.8-inch 250 GB hard drive in 1.8-inch hard drive bay, this 2.5-inch bay can be used for a 2.5-inch 250 GB secondary hard drive, for RAID configuration.

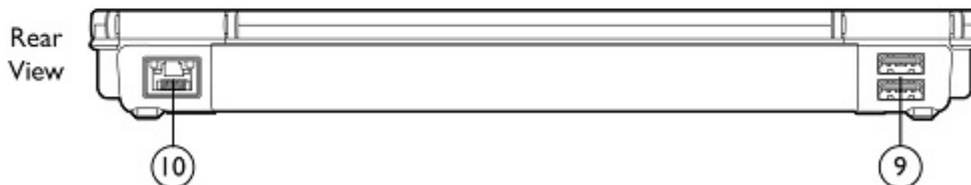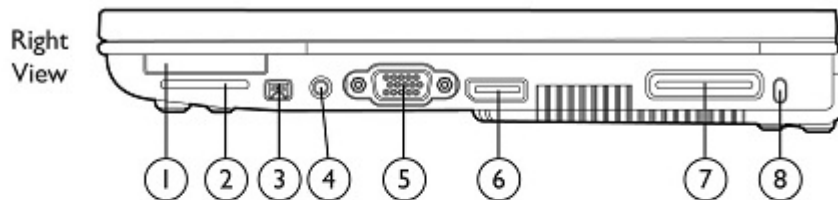

- | | |
|---|-------------------------|
| 1. ExpressCard/34 slot | 6. DisplayPort |
| 2. Secure Digital (SD) slot | 7. Docking connector |
| 3. 1394a port | 8. Kensington Lock slot |
| 4. Combo headphone/microphone jack | 9. (2) USB 2.0 ports |
| 5. VGA connector (external monitor/projector) | 10. RJ-45/Ethernet port |

Overview

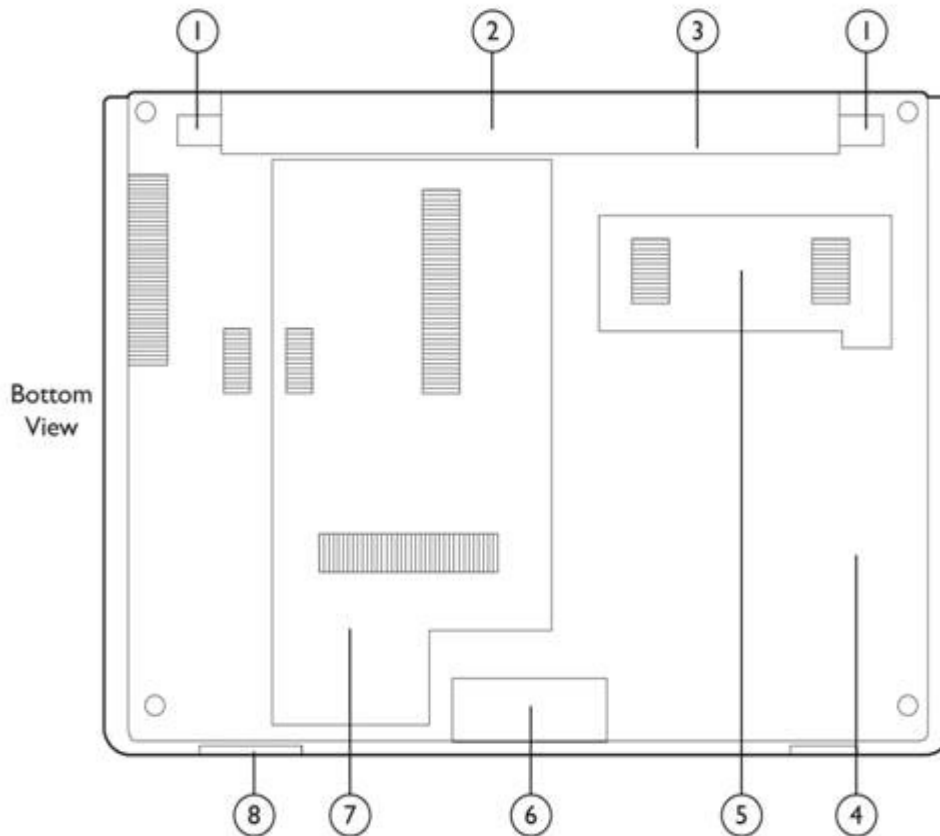

- | | |
|---|--|
| 1. Battery release latch | 5. Wireless module compartment |
| 2. Battery bay | 6. Speakers |
| 3. SIM slot for WWAN (select models) – inside battery bay | 7. 1.8-inch hard drive bay and memory module compartment |
| 4. 2.5-inch bay | 8. Bluetooth compartment |

At A Glance

- Genuine Windows 7 versions, Genuine Windows Vista versions, or FreeDOS
- Choice of an Intel® Core™ i7 or Core i5 standard voltage processor for maximum performance or an Intel® Core™ i7 low voltage processor with option for an optical drive or secondary hard drive
- Intel vPro technology (optional) enables you to remotely monitor, diagnose, and repair PCs over the network, even if a system's OS is inoperable or it is powered off
- Industrial, business rugged HP DuraCase construction features a full magnesium alloy chassis, magnesium/aluminum display enclosure, metal alloy hinges, and improved display latch; designed to meet the military standard Mil-Std-810G for vibration, dust, humidity, altitude, and high temperature operation*
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, report workforce power consumption
- Choice of 9-cell, 6-cell, or 3-cell battery, including HP Long Life batteries, to customize weight, run-time, and battery life to your needs
- Touch-sensitive controls for HP QuickLook 3 (instant access to e-mail, calendar, contacts and tasks), HP QuickWeb, wireless on/off, touchpad on/off, mute, volume down, and volume up
- Flexible wireless connectivity options:
 - Integrated HP un2420 EV-DO/HSPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology with GPS



Overview

- Integrated Intel Centrino® Advanced-N 6200 802.11 a/b/g/n or Broadcom 802.11a/b/g/n or b/g wireless LAN module
 - Bluetooth® v2.1
- Choice of hard drive: up to 500 GB (2.5-inch) or up to 320 GB (1.8-inch) with HP 3D DriveGuard protection, or 80/160 GB Solid State Drive
- Optional fixed optical drive or secondary hard drive for RAID support available with low voltage processor
- 12.1-inch diagonal LED-backlit WXGA display, Ambient Light Sensor
- Intel HD Graphics with dynamic frequency
- Enhanced security features including integrated Smart Card Reader, HP ProtectTools, Computrace LoJack Pro ready, HP SpareKey, HP Disk Sanitizer, TPM 1.2 ;** optional HP Fingerprint Sensor, and optional HP Privacy Filter
- New central management software for HP ProtectTools to manage the security of multiple notebooks from a single point
- DisplayPort for sharper, deeper images
- Optional HP 2540 Docking Station provides additional DisplayPort, eSATA port, four additional USB ports, audio in/out ports, RJ-45, VGA, and new HP Docking Station Cable Lock
- Optional 2 MP Webcam with Business Card Reader Software
- Dual pointing devices (touchpad with scroll zone and pointstick)
- Spill-resistant keyboard with drains, DuraKeys
- HP Night Light
- ExpressCard/34 slot
- Secure Digital (SD) slot

* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

** TPM module disabled where not permitted by law (for example, Russia and China).



Standard Features (availability may vary by country)

Processors

Intel Standard Voltage Processor, soldered

Intel Core i7-640M Processor (2.80 GHz, 4 MB L3 cache)*

Up to 3.46 GHz with Intel Turbo Boost Technology

Intel Core i7-620M Processor (2.66 GHz, 4 MB L3 cache)*

Up to 3.33 GHz with Intel Turbo Boost Technology

Intel Core i7-580M Processor (2.66 GHz, 3 MB L3 cache)*

Up to 3.33 GHz with Intel Turbo Boost Technology

Intel Core i7-560M Processor (2.66 GHz, 3 MB L3 cache)*

Up to 3.2 GHz with Intel Turbo Boost Technology

Intel Core i5-540M Processor (2.53 GHz, 3 MB L3 cache)*

Up to 3.06 GHz with Intel Turbo Boost Technology

Intel Core i5-520M Processor (2.4 GHz, 3 MB L3 cache)*

Up to 2.93 GHz with Intel Turbo Boost Technology

Intel Core i3-370M Processor (2.40 GHz, 35W, 3 MB L3 cache)*

Intel Low Voltage Processor, soldered

Intel Core i7-660LM Processor (2.26 GHz, 4 MB L3 cache)*

Up to 3.06 GHz with Intel Turbo Boost Technology

Intel Core i7-640LM Processor (2.13 GHz, 4 MB L3 cache)*

Up to 2.93 GHz with Intel Turbo Boost Technology

Intel Core i7-620LM Processor (2.00 GHz, 4 MB L3 cache)*

Up to 2.80 GHz with Intel Turbo Boost Technology

* Intel's numbering is not a measurement of higher performance.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

Operating System

Preinstalled

Genuine Windows 7 Professional Edition 32*

Genuine Windows 7 Professional Edition 64*

Genuine Windows 7 Home Premium Edition 32*

Genuine Windows 7 Home Premium Edition 64*

Genuine Windows 7 Home Basic 32 (select countries)*

Genuine Windows Vista Business 32**

Genuine Windows Vista Home Basic 32**

FreeDOS

Supported

Genuine Windows Vista Business 64**

Genuine Windows Vista Enterprise 32**

Genuine Windows Vista Enterprise 64**

Genuine Windows 7 Enterprise 32*

Genuine Windows 7 Enterprise 64*

Genuine Windows 7 Ultimate 32*

Genuine Windows 7 Ultimate 64*

Certified

SuSE Linux Enterprise Desktop 11

* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See: <http://www.microsoft.com/windows/windows-7/> for details.

** Certain Windows Vista product features require advanced or additional hardware. See:



Standard Features (availability may vary by country)

<http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

Chipset

Mobile Intel QM57 Express Chipset

Intel Core i5 with vPro/Core i7 with vPro technology capable

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with an Intel Centrino® Advanced-N 6200 series WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology (AMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

NOTE: Some functionality of Intel Core i5 with vPro/Core i7 with vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel Core i5 with vPro/Core i7 with vPro technology is dependent on 3rd party software providers. Compatibility with future "virtual appliances" is yet to be determined.

Graphics

Intel HD Graphics with dynamic frequency
Microsoft DirectX 10.1 (Shader Model 4.1)

Display

Internal

12.1-inch diagonal LED-backlit WXGA anti-glare (1280 x 800)
Ambient Light Sensor
Optional HP Privacy Filter

External

Up to 32-bit per pixel color depth
DisplayPort supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz
VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.



Standard Features (availability may vary by country)

Memory	Standard	DDR3 PC3-10600 SDRAM (1333 MHz)* Two SODIMM slots supporting dual-channel memory 1024 MB, 2048 MB and 4096 MB SODIMMs
	Maximum	Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory channels.

* Memory bus runs at a maximum of 1066 MHz.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Communications	Integrated Intel Gigabit Ethernet (10/100/1000 NIC)*
	56K V.92 modem**
	* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required. ** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

Wireless Devices	Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Mobile Broadband (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature or as an option to be added later. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.
	HP un2420 EV-DO/HSPA Mobile Broadband Module Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications such as Computrace LoJack Pro Premium for HP ProtectTools. NOTE: Separately purchased mobile network operator service is required. Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.
	All 802.11 integrated wireless LAN options Wi-Fi Certified* Cisco Compatible Extensions support Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support Two antennas integrated in the display enclosure
	Intel Centrino Advanced-N 6200 (2x2) Integrated support for 802.11a, b, g, and n* 2 transmit, 2 receive antennas Up to 300 mbps data rate



Standard Features (availability may vary by country)

Broadcom 4322AGN 802.11a/b/g/n Wi-Fi Adapter	Integrated support for 802.11a, b, g, and n Up to 300 mbps data rate
Broadcom 4312G 802.11b/g WiFi Adapter	Integrated support for 802.11 b and g Up to 54 mbps data rate
HP Integrated Module with Bluetooth Wireless Technology	Bluetooth Specification v2.1 compliant Works with a wide range of Bluetooth devices

* In countries where 802.11n is not allowed, this capability is not enabled (802.11a/b/g only).

Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. U.S. and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19 mm x 19 mm key pitch (center-to-center spacing), 2.0 mm stroke, and comfort-dished keycaps.

HP DuraKeys is a clear coating applied over the notebook keyboard that helps protect the finish and the printed characters on the keys. HP DuraFinish helps protect the finish on the keyboard deck, graphics, and icons from normal wear and tear.

HP Night Light shines directly on keyboard for low-light conditions.

Touch-sensitive controls

Touch-sensitive controls provide easy access to the following features: HP QuickLook 3, HP QuickWeb, wireless on/off, touchpad on/off, volume mute, volume down, volume up.

Dual Pointing devices

Touchpad with scroll zone, two pick buttons
Pointstick, two additional pick buttons

Expansion card slots

ExpressCard/34 slot	Supports ExpressCard/34
Integrated Smart Card Reader	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
Secure Digital slot	Supports SD (Secure Digital), MMC (MultiMedia Card)



Standard Features (availability may vary by country)

Internal Storage

2.5-inch storage bay	Standard Voltage Processor Configurations
	2.5-inch 250/320/500 GB 7200 rpm SMART SATA II Hard Drive
	-or- 2.5-inch 80/160 GB Solid State Drive

NOTE: 1.8-inch hard drive bay is not available with a standard voltage processor.

Low Voltage Processor Configurations

1.8-inch hard drive bay	1.8-inch 160/250/320 GB 5400 rpm SMART SATA II Hard Drive
	-or- 1.8-inch 80/160 GB Solid State Drive
2.5-inch secondary hard drive for RAID support*	2.5-inch 250 GB 7200 rpm SMART SATA II Hard Drive

* Requires 1.8-inch 250 GB 5400 rpm hard drive in 1.8" hard drive bay.

NOTE: These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 15 GB is reserved for the system recovery software.

HP 3D DriveGuard (Windows models with hard drives only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

Fixed Optical Bay (low voltage processor configurations only)

9.5 mm SATA optical drive	DVD+/-RW SuperMulti DL Drive DVD-ROM Drive
-or-	
Secondary hard drive*	2.5-inch 250 GB 7200 rpm SMART SATA II Hard Drive for RAID support
-or-	

Weight Saver

* Requires 1.8-inch 250 GB 5400 rpm hard drive in 1.8-inch hard drive bay.

External Optical Drive

Optional HP External USB CD/DVD R/RW Drive



Standard Features (availability may vary by country)

Interfaces	ExpressCard/34 slot	One
	Smart Card Reader	One
	External monitor	Two – (1) DisplayPort, (1) VGA
	Secure Digital slot	One
	1394a	One
	Combo	One
	headphone/microphone jack	
	Power connector	One
	RJ-11/modem	One
	RJ-45/Ethernet	One
	USB 2.0	Three (including one powered) Fourth USB 2.0 port available on configurations with 2.5-inch hard drive
	Docking connector	For HP 2540 Docking Station

Audio/Visual	HD audio (HP Premier Sound)
	Integrated dual-microphone array
	Integrated speakers
	Touch-sensitive controls for volume up, volume down, and mute
	Combo headphone/microphone jack

Optional 2 MP webcam with Business Card Reader software

- Supports videoconferencing and still image capture
- Large image sensor for excellent color matching and good low light sensitivity
- Up to 30 frames/sec
- AutoMacro focus lens
- Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
- 16-bit true color (camera sensors output YCrCb format among others)

Software	Preinstalled software with Windows operating system	HP Recovery Manager (available with Windows 7 or Vista only)
		HP Support Assistant (available with Windows 7 or Vista only)
		HP ProtectTools Security Manager
		HP QuickLaunch Buttons Software
		HP QuickLook 3
		HP QuickWeb
		HP Power Assistant
		HP Connection Manager 3.1
		HP Wireless Assistant
		HP DayStarter
		Microsoft Office 2010 preloaded (purchase of a Product Key required to activate a full Office 2010 suite)*
		McAfee Total Protection**
		PDF Complete Special Edition***
		Roxio Creator Business 10 (select models)
		InterVideo WinDVD (select models)
		Synaptics Touchpad Driver



Standard Features (availability may vary by country)

Additional software available from the web	HP Webcam Software
	WinZip 14.5 (trial version)
	HP SoftPaq Download Manager
	HP Client Manager Software
	HP Client Management Solutions
	Java Card Security for HP ProtectTools

* Microsoft Office 2010 Preloaded includes reduced functionality versions of Word and Excel. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and <http://www.office.com>.

** 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

*** 60 day trial; purchase license afterwards for full functionality

HP Recovery Manager	Models shipped with Windows 7 or Windows Vista include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 15 GB of the hard drive is reserved for the system recovery software.
---------------------	--

Security	Standard Features	HP ProtectTools Security Manager Integrated Smart Card Reader Enhanced Pre-Boot Security HP SpareKey One-Step Logon Setup Password DriveLock Password TPM 1.2 Embedded Security Chip* TPM Enhanced DriveLock* HP Disk Sanitizer Kensington Lock slot Support for Computrace** LoJack Pro for HP ProtectTools
	Optional Features	HP Fingerprint Sensor Enhanced sensor scans the fingerprint to uniquely identify and authenticate a person. HP Privacy Filter Narrows viewing area so that screen data is visible only to persons directly in front of the monitor. Computrace** LoJack Pro Premium for HP ProtectTools with GPS Tracking Subscription based security solution providing the ability to track, initiate physical recovery, conduct asset management, and perform remote data delete by utilizing GPS technology. GPS functionality requires HP un2420 EV-DO/HSPA Mobile Broadband Module.

* TPM module disabled where use is restricted by law; for example, Russia and China.

** The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.



Standard Features (availability may vary by country)

HP ProtectTools Security Manager with Central Management

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:

- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Computrace LoJack Pro for HP ProtectTools

HP ProtectTools is now centrally manageable with the capability to manage notebooks from a single point. Security is management ready out of the box, in partnership with Digital Persona. New features address requirements that customers expect from a centrally managed security solution such as user provisioning, credential reset, and credential revocation.

HP ProtectTools provides two separate management solutions, targeted at the enterprise and the SMB:

- Digital Persona Pro AD: Designed for the enterprise customer. Integrates with Active Directory and gives IT Managers the ability to provision users, create login policies based on passwords, biometrics or smartcards. Management features also include remote credential recovery in case the user forgets the password, loses the smartcard or cannot use the fingerprint reader for any reason. In addition, advanced auditing capabilities are also built in. Digital Persona Pro AD is available now.
- Digital Persona Pro Workgroup: Designed for the small business customer. Provides features similar to the Active Directory version, but for workgroups. Workgroup activation is built into HP ProtectTools, and activation of up to five seats are completely free.

Power Supply

External 65-watt Smart AC adapter, 6-foot (1.8-meter) power cord included.
Total length including external AC adapter is 12 feet (3.66 meter).
HP Fast Charge*

*HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 9- cell primary batteries.

Battery

Primary Battery

HP 9-cell 93 WHr Li-Ion Primary Battery
HP 6-cell 62 WHr Li-Ion Primary Battery
HP Long Life 6-cell 55 WHr Li-Ion Primary Battery



Standard Features (availability may vary by country)

Battery Life

	Intel Standard Voltage Processor	Intel Low Voltage Processor
HP 9-cell Primary Battery	Up to 11 hours 30 minutes	Up to 12 hours 30 minutes
HP 6-cell Primary Battery	Up to 7 hours 30 minutes	Up to 8 hours
HP Long Life 6-cell Primary Battery	Up to 7 hours	Up to 7 hours 30 minutes
HP 3-cell Primary Battery	Up to 3 hours 45 minutes	Up to 4 hours
HP Long Life 3-cell Primary Battery	Up to 3 hours 15 minutes	Up to 3 hours 30 minutes

NOTE: Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark www.bapco.com/products/mobilemark2007 for additional details.

System Standby Time

Up to 1 week

Power Conservation

Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)
Intel Display Power Saving technology
Hibernation
Standby
ACPI compliance

Docking and Stands

HP 2540 Docking Station
HP USB 2.0 Docking Station
HP Essential USB 2.0 Port Replicator
HP Dual Hinge Notebook Stand
HP Display and Notebook Stand
HP Basic Adjustable Stand
HP Adjustable Display Stand
HP Adjustable Dual Display Stand

NOTE: Some HP Docking stations may not support every feature of some HP Notebook models. Please refer to the individual docking station documentation for specific information about supported features.

Service and Support

HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country; 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.



Options (availability may vary by country)

Memory	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA
Storage	HP 250GB Pocket Media Drive	FE477AA
	HP External USB Drive CD/DVD R/RW	FS943AA
	HP 2.5-inch SATA 500 GB 7200 rpm Hard Drive*	AU098AA
	HP 2.5-inch SATA 320 GB 7200 rpm Hard Drive*	AS282AA
	*Supported as primary hard drive on configurations with a standard voltage processor. Supported as secondary hard drive on configurations with a low voltage processor. Using one of these drives in the 2.5-inch drive bay replaces the optional optical drive.	
Expansion Solutions	HP 2540 Docking Station	VU895AA
	HP Basic Adjustable Stand	AL549AA
	HP USB 2.0 Docking Station	FQ834AA
	HP Essential USB 2.0 Port Replicator	AQ731AA
	HP Dual Hinge Notebook Stand	AW661AA
	HP Display & Notebook Stand	AW662AA
	HP Adjustable Display Stand	AW663AA
	HP Adjustable Dual Display Stand	AW664AA
Communications	HP un2420 EVDO/HSPA Mobile Broadband Module	WD301AA
Power	65W Smart AC Adapter	ED494AA
	90W Smart AC/Auto/Air Combo Adapter	AJ652AA
	HP 65W Slim Adapter	AX727AA
	HP Smart 65W Travel AC Adapter	AU155AA
	90W Smart AC Adapter	ED495AA
	HP 6-Cell Li-Ion Primary Battery	EH767AA
	HP 9-Cell Li-Ion Primary Battery	BJ803AA



Options (availability may vary by country)

Carrying Cases	HP Deluxe Nylon Backpack	RR317AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA
	HP Basic Backpack	AM863AA
	HP Basic Messenger	AP355AA
	HP Basic Carrying Case	AJ078AA
	HP Professional Series Carrying Case	AT886AA
	HP Professional Series Backpack	AT887AA
	HP Professional Series Messenger	AT888AA
	HP Professional Series Designer Tote	AT889AA
	HP Professional Series Slip Case	AT890AA
	HP Elite Series Quick Case	AT892AA

Security	HP/Kensington MicroSaver Cable Lock	PC766A
	HP Compaq Notebook Cable Lock	AY475AA
	HP Docking Station Cable Lock	AU656AA
	HP 12.1" Display Privacy Filter	AJ356AA

Input/Output Devices	HP USB Keyboard & Mouse Bundle	RC465AA
	HP USB Optical Travel Mouse	RH304AA
	HP Wireless Mouse	AR085AA
	HP PS/2 Keyboard & Mouse Bundle (requires USB-PS/2 adapter)	RC464AA
	HP BT Headset	AR084AA
	HP Mobile Audio Speakers	FS944AA
	HP Mobile Productivity Bundle	AQ729AA
	HP Notebook Companion Projector	AX325AA
	HP Migration Cable for Windows 7	AY493AA
	HP Premium Autofocus Webcam	KQ245AA
	Premium Digital Headset	KJ270AA



Memory

DDR3 PC3-10600 SDRAM (1333 MHz)*

Two SODIMM slots supporting dual-channel memory

SODIMM sizes supported: 1024 MB, 2048 MB and 4096 MB

Standard Memory

- 2048 MB (2048 MB x 1)
- 3072 MB (2048 MB + 1024 MB)
- 4096 MB (4096 MB x 1)
- 4096 MB (2048 MB x 2)
- 6144 MB (4096 MB + 2048 MB)
- 8192 MB (4096 MB x 2)

Optional Memory Upgrades

Support for up to 8192 MB of memory with the installation of optional DDR3 SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
4096 MB	4096 MB	empty
6144 MB	4096 MB	2048 MB
8192 MB	4096 MB	4096 MB

* Memory bus runs at a maximum of 1066 MHz.

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

Memory Upgrades

HP 1 GB (DDR3 1333 MHz) SODIMM
 HP 2 GB (DDR3 1333 MHz) SODIMM
 HP 4 GB (DDR3 1333 MHz) SODIMM

AT911AA
 AT912AA
 AT913AA



Storage

Internal Storage Device

Standard Voltage Processor Configurations

Hard Drives (2.5-inch SMART SATA II)	Quantity Supported	Drive Bay
250 GB 7200 rpm	One	2.5-inch storage bay
320 GB 7200 rpm		
500 GB 7200 rpm		

- or -

Solid State Drive (2.5-inch)

80 GB Solid State Drive	One	2.5-inch storage bay
160 GB Solid State Drive		

NOTE: 1.8-inch hard drive bay is not available with a standard voltage processor.

Low Voltage Processor Configurations

Hard Drives (1.8-inch SMART SATA II)	Quantity Supported	Drive Bay
160 GB 5400 rpm	One	Dedicated 1.8" hard drive bay
250 GB 5400 rpm		
320 GB 5400 rpm		

- or -

Solid State Drive (1.8-inch)

80 GB Solid State Drive	One	Dedicated 1.8" hard drive bay
160 GB Solid State Drive		

Secondary Hard Drive for RAID*

(2.5-inch SMART SATA II)		
250 GB 7200 rpm	One	2.5-inch storage bay

* Requires 1.8-inch 250 GB 5400 rpm hard drive in 1.8-inch hard drive bay.

Optical Drive Support

NOTE: Internal optical drive supported on low voltage processor configurations only.

Fixed optical drives (95mm SATA)	Quantity Supported	Drive Bay
DVD+/-RW SuperMulti DL Drive	One	Fixed optical bay
DVD-ROM Drive		

External Optical Drives	Quantity Supported	Optional Expansion Unit
CD/DVD R/RW Drive	One	HP External USB CD/DVD R/RW Drive



Technical Specifications

System Unit	Dimensions (HxWxD)	1.10 in (at front) x 11.1 in x 8.4 in 28 mm (at front) x 282.2 mm x 213.4 mm 1.34 in (34 mm) height at rear
	Weight	Starting at 3.38 lb (1.53 kg) with weight saver (no optical drive) Starting at 3.64 lb (1.65 kg) with optical drive
NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 1.8-inch hard drive, 3-cell battery, and wireless LAN.		
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	Standard Voltage: 14.0 W Low Voltage: 13.5 W
Temperature	Max Operating Power	< 65 W
	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
Relative Humidity	Non-operating	-4° to 140° F (-20° to 60° C)
	Operating	10% to 90%, non-condensing
Shock	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
	Operating	125 G, 2 ms, half-sine
Random Vibration	Non-operating	200 G, 2 ms, half-sine
	Operating	0.75 grms
Altitude (unpressurized)	Non-operating	1.50 grms
	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
Industry Standard Certifications	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered Gold in United States**
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KCC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes



Technical Specifications

Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes
UKRSERTCOMPUTER	Yes

* Configurations of the HP EliteBook 2540p that are ENERGY STAR qualified are identified as HP EliteBook 2540p ENERGY STAR on HP websites and on www.energystar.gov.

** EPEAT Gold Registered in U.S. EPEAT registration varies by country. See www.epeat.net for registration status by country.

NOTE: For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

HP 65W Smart AC Adapter

Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)
Weight	0.62 lb (280 g)
Input	100 to 240 VAC
	Input Efficiency 87% min at 115 VAC
	Input frequency range 47 to 63 Hz
	Input AC current 1.7 A at 90 VAC, 0.85 A at 180 VAC
Output	Output power 65W
	DC output 18.5V
	Hold-up time 5 msec at 115 VAC input
	Output current limit <11A, Over voltage protection- 29V max automatic shutdown
Connector	3 pin/grounded, mates with interchangeable cords
Environmental Design	Operating temperature 32° to 104° F (0° to 40° C)
	Non-operating (storage) temperature -4° to 149° F (-20° to 65° C)
	Altitude 0 to 10,000 ft (0 to 3,048 m)
	Humidity 20% to 80%
	Storage Humidity 10% to 90%
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.

Displays



Technical Specifications

12.1-inch LED-backlit WXGA anti-glare	Active Area (W x H)	10.3 x 6.4 in (26.1 x 16.3 cm)	
	Diagonal Size	12.1 in (30.7 cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.204 mm
		Format	1280 x 800
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	125	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) SVA 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

Internal Storage

500 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	500 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum)	150 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1.5ms
		Average	11ms
		Maximum	22ms
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	



Technical Specifications

320 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	320 GB	
	Height	0.37 in (9.5 mm) or on some models 0.28 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum)	150 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1.5ms
		Average	11ms
		Maximum	22ms
	Rotational Speed	7200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

250 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	250 GB	
	Height	0.37 in (9.5 mm) or on some models 0.28 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum)	150 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1.5ms
		Average	11ms
		Maximum	22ms
	Rotational Speed	7200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	



Technical Specifications

320 GB 5400 rpm 1.8" SATA Hard Drive	Drive Weight	0.13 lbs (62 g)	
	Capacity	320 GB	
	Height	0.31 in (8 mm)	
	Width	2.12 in (54 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s	
	Transfer Rate	Synchronous (maximum)	150 MB/s (Drive Capacity)
	Seek Time (typical reads, including settling)	Single Track	3ms
		Average	15ms
		Maximum	26ms
	Rotational Speed	5400 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

250 GB 5400 rpm 1.8" SATA Hard Drive	Drive Weight	0.13 lbs (62 g)	
	Capacity	250 GB	
	Height	0.31 in (8 mm)	
	Width	2.12 in (54 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s	
	Transfer Rate	Synchronous (maximum)	150 MB/s (Drive Capacity)
	Seek Time (typical reads, including settling)	Single Track	3ms
		Average	15ms
		Maximum	26ms
	Rotational Speed	5400 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	



Technical Specifications

160 GB 5400 rpm 1.8" SATA Hard Drive	Drive Weight	0.13 lbs (62 g)	
	Capacity	160 GB	
	Height	0.31 in (8 mm)	
	Width	2.12 in (54 mm)	
	Interface	ATA-8, SATA 2.6, 1.5 Gb/s	
	Transfer Rate	Synchronous (maximum)	150 MB/s (Drive Capacity)
	Seek Time (typical reads, including settling)	Single Track	3ms
		Average	15ms
		Maximum	26ms
	Rotational Speed	5400 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

256 GB 2.5-Inch SATA Solid State Drive	Weight	80.1 Grams	
	Capacity	256 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	SATA	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		220 MB/s	200 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-7; SATA 2.6; DIPM	

160 GB 2.5-inch SATA Solid State Drive	Weight	78 Grams	
	Capacity	160 GB	
	Height	0.275 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	SATA	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		250 MB/s	70 MB/s
	Logical Blocks	312,581,808	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-7 ;SATA 2.6; DIPM	



Technical Specifications

80 GB 2.5-inch SATA Solid State Drive	Weight	0.19 lbs (86 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	SATA	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		250 MB/s	70 MB/s
	Logical Blocks	156,301,488	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-7; SATA 2.6; DIPM	

160 GB 1.8-inch SATA Solid State Drive	Weight	0.08 lbs (35 g)	
	Capacity	160 GB	
	Height	0.19 in (5 mm)	
	Width	2.12 in (54 mm)	
	Interface	ATA-7 / SATA 2.6	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		250 MB/s	70 MB/s
	Logical Blocks	312,581,808	
	Operating Temperature	32° to 158°F (32° to 70°C) [case temp]	
	Features	ATA Security	

80 GB 1.8-inch SATA Solid State Drive	Weight	0.08 lbs (35 g)	
	Capacity	80 GB	
	Height	0.19 in (5 mm)	
	Width	2.12 in (54 mm)	
	Interface	ATA-7 / SATA 2.6	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		250 MB/s	70 MB/s
	Logical Blocks	156,301,488	
	Operating Temperature	32° to 158°F (32° to 70°C) [case temp]	
	Features	ATA Security	

Optical Drives



Technical Specifications

DVD-ROM Drive	Access Times	Random	< 120 ms CD (typical) < 130 ms DVD (typical)
	Max Data Transfer Rate	24X-CD-ROM 8X-DVD	Up to 3,600 KB/s Up to 10,800 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5 GB	
	Transport	Tray Loading	
DVD+/-RW SuperMulti DL Drive	Access Times	Random	< 150 ms CD (typical) < 145 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM	Up to 3,600 KB/s
		8X DVD	Up to 10,800 KB/s
		24X CD-R	Up to 3,600 KB/s
		16X CD-RW	Up to 2,400 KB/s
		8X DVD+R	Up to 10,800 KB/s
		4X DVD+R Dual Layer	Up to 5,400 KB/s
		8X DVD+RW	Up to 10,800 KB/s
		8X DVD-R	Up to 10,800 KB/s
		4X DVD-R Dual Layer	Up to 5,400 KB/s
		6X DVD-RW	Up to 8,100 KB/s
		5X DVD-RAM	Up to 6,750 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	



Technical Specifications

Security

HP Fingerprint Sensor (optional)	Mobile Voltage Operation	3.0V-3.6V Single Supply
	Operating Temperature	32° - 158°F (0° - 70°C)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

Audio

Hardware	Implementation	IDT 92HD75B High Definition CODEC
	Touch-Sensitive Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Combo Microphone /Headphone	

Device Used	Operation
Stereo Headphone	Headphone works. Integrated microphone works.
External PC Microphone	External microphone does not work. Integrated microphone works.
Combo headphone / microphone without "Answer" button	Headphone and microphone in headset work as advertised.
Combo headphone / microphone with "Answer" button	Headphone and microphone in headset work initially whenever headset is plugged in; integrated microphone in PC is disabled. If "answer" button is pushed, microphone in headset is disabled, integrated microphone in PC is enabled.

Integrated Microphone Yes, dual-microphone array when equipped with optional webcam



Technical Specifications

Audio Output Quality	Frequency Response	20 Hz - 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz - 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Communications

Integrated Intel Gigabit Network Connection (10/100/1000 NIC)	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
		100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
		1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)
		Auto-Negotiation (Automatic Speed Selection)
		Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
		IEEE 802.1p QoS (Quality of Service) Support
	Power Management	IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
		ACPI compliant -- multiple power modes
	Performance Features	Situation-sensitive features reduce power consumption
		TCP/IP/UDP Checksum Offload (configurable)
Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)	
	PXE 2.1 Remote Boot	
	Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))	
	Comprehensive diagnostic and configuration software suite	
Interface	Intel Advanced Management Technology 6.0 (iAMT)	
	PCI Express x1 based, SMBUS dedicated connection with Intel® 5 Series Chipset	
NIC Device Driver Name	Intel 82577 Gigabit Network Connection	



Technical Specifications

V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/ Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data
		V.8bis
		V.80
		V44, V.42bis, MNP5 (Compression)
		V.42 (LAPM, MNP2-4) (Error Correction)
		Optional symbol rates: 2800, 3429 Asymmetric Symbol rates
		Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation
		V.34
		V.32bis
		V.32
		V.23
		V.22bis
		V.22
V.21		
Fax Mode Capabilities	Bell 212A	
	Bell 103J	
	TIA/EIA-578-B (Class 1)	
	T.30, T.4 (Group 3)	
	V.17	
	V.29	
Command Set	V.27ter	
	V.21 Channel 2	
	V.250 (Partial)	
	TIA-602	
	Identification: +GMI, +GMM, +GMR	
	Port control: +IPR, +ICF, +IFC, +ILRR	
	Modulation: +MS, +MR, +MA	
	Error control: +ES, +ER, +EB, +ESR, +ETBM	
	Data compression: +DS, +DR	
	V.251	



Technical Specifications

HP un2420 EV-DO/HSPA Mobile Broadband Module	Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Maximum Data Rates	UMTS (HSPA) - 7.2 Mbps (Download), 2.0Mbps (Upload) CDMA (EVDO Release A) - 3.1 Mbps (Download), 1.8Mbps (Upload)
	GPS	Standalone GPS enabled
	GPS Bands	L1 - 1575.42 MHz
	Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
	Maximum Power Consumption	2500mA (peak); 1000mA (average)
	Power Consumption, Sleep Mode	5 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard, USB 2.0 interface
	Weight	11.5 g
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	Voltage, Operating	3.3v +/- 10%
	Temperature, Operating (from TIA/EIA/IS-98-D)	-22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
	Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
	Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	Configuration Utilities	HP Connection Manager
	LED Activity	LED Off - Radio Off; Solid LED On - Radio On

Intel Centrino Advanced-N 6200	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b
--------------------------------	------------------------	------------------------------



Technical Specifications

	IEEE 802.11g IEEE 802.11n*
	* In countries where 802.11n is not allowed, this capability is not enabled.
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security ¹	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST) Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2 Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
Output Power (for CCK and OFDM) ²	17 dBm max
Power Consumption	Transmit: 2.3 Watts (max, with two spatial streams) Receive: 1 Watt (max with two spatial streams) Idle mode ³ : 35 mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ⁴	54 Mbps: -76 dBm, 6 Mbps: -92 dBm
Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance
Form Factor	PCI-Express Half-MiniCard
Weight	0.0075 lb (3.4 g)
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
Operating Voltage	3.3V +/- 9%



Technical Specifications

Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Broadcom 4322AGN 802.11a/b/g/n WiFi Adapter	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*
	Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
	Frequency Support	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)



Technical Specifications

Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK) ²	17 dBm , nominal	
Output Power (for OFDM; power varies by data rate) ²	15 dBm , nominal	
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ³	270 Mbps: -61dBm, , 54 Mbps: -72 dBm, 11 Mbps: -85 dBm , 1 Mbps: -92 dBm	
Antenna Connections	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.		

Broadcom 4312G 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM



Technical Specifications

Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.	
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK)²	17 dBm , nominal	
Output Power (for OFDM; power varies by data rate)²	15 dBm , nominal	
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm	
Antenna Connections	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.



Technical Specifications

HP Integrated Module with Bluetooth 2.1 Wireless Technology	Bluetooth Specification	2.1 Compliant
	Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
	Frequency Band	2402 to 2480 MHz
	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
	Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
	Antenna	Internally integrated within module
	Range	Up 33 ft (10 m)
	Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
	Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
	Security	Full support of Bluetooth Security Provisions
	Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
	Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
	Humidity	Operating 10% to 90% Non-operating 5% to 95%
	Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
Bluetooth Profiles Supported		Serial Port Profile (SPP) ¹
		Service Discovery Application Profile (SDAP)
		Dial-Up Networking (DUN) ^{1,2}
		Generic Object Exchange Profile (GOEP) ^{1,2}
		Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP)



Technical Specifications

Synchronization Profile (SYNC)
 Hard Copy Cable Replacement (HCRP)^{1,2}
 Personal Area Networking Profile (PAN)^{1,2}
 Human Interface Device Profile (HID)^{1,2,3}
 FAX Profile (FAX)
 Basic Imaging Profile (BIP)²
 Headset Profile (HSP)
 Hands Free Profile (HFP)
 Advanced Audio Distribution Profile (A2DP)

1. indicates the profile is supported by Microsoft Windows XP SP2

2. indicates the profile is part of Windows Vista

Eco Data

Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT – Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

Energy Consumption

	115 VAC	230 VAC	100 VAC
Normal Operation	10.9 W	11.49 W	10.88 W
Sleep (Energy Star low power mode)	0.9749 W	1.143 W	0.9644 W
Off	0.3348 W	0.4522 W	0.3253 W

Heat Dissipation*

	115 VAC	230 VAC	100 VAC
Normal Operation	37 BTU/hr	39 BTU/hr	37 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	1 BTU/hr	2 BTU/hr	1 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.5	26.7
Fixed Disk (random writes)	3.5	26.7

System fan is usually off except when charging the battery

Batteries

This battery(s) in this product complies with EU Directive 2006/66/EC

Batteries used in the product do not contain:



Technical Specifications

Additional information:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

- CR2032 (coin cell), Li-ion
- 6-cell high capacity Lithium-Ion battery (optional 8 cell available)

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0.33% post consumer recycled plastic (by wt.)

This product is greater than 85% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Paper – 97 g
- Internal:
 - Polyethylene low density solid – 13 g
 - Molded Pulp – 100 g
 - Polyethylene low density – 4 g
- The paper packaging material is made from 80% recycled content.
- The Polyethylene low density solid material is made from 100% recycled content.
- The Molded Pulp packaging material is made from 80% recycled content.
- The Polyethylene low density material is made from 100% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in



Technical Specifications

Material Usage

- packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the

Environment (http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 micro-grams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



Technical Specifications

Hewlett-Packard

Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

[http://www.hp.com/hpinfo/globalcitizenship/environment/
productdesign/ecolabels.html](http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html)

ISO 14001 certificates:

[http://www.hp.com/hpinfo/globalcitizenship/environment/
operations/envmanagement.html](http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html)

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

