

OVERVIEW



1. Card reader	5. HDMI
2. USB 2.0	6. USB-C 3.2 Gen 1 (data transfer only)
3. Power connector	7. Headphone / microphone combo jack (3.5mm)
4. USB 3.2 Gen 1	

PERFORMANCE

Processor

Processor Family

AMD Athlon™ or AMD Ryzen™ 3 / 5 Processor

Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Athlon™ Gold 7220U	2	4	2.4GHz	3.7GHz	1MB L2 / 4MB L3	AMD Radeon™ 610M
AMD Athlon™ Silver 7120U	2	2	2.4GHz	3.5GHz	1MB L2 / 2MB L3	AMD Radeon™ 610M
AMD Ryzen™ 3 7320U	4	8	2.4GHz	4.1GHz	2MB L2 / 4MB L3	AMD Radeon™ 610M
AMD Ryzen™ 5 7520U	4	8	2.8GHz	4.3GHz	2MB L2 / 4MB L3	AMD Radeon™ 610M

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 Home Single Language in S mode
- Windows® 11 Home in S mode
- No preload operating system

Graphics

Graphics

Graphics	Type	Memory	TGP	Key Features
AMD Radeon™ 610M	Integrated	Shared	Share CPU TDP	DirectX® 12

Monitor Support

Monitor Support

Supports up to 2 independent displays (native display and 1 external monitor via HDMI®)

- HDMI® supports up to 4K@30Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory

- 4GB soldered memory, not upgradable
- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type

LPDDR5-5500

Storage

Max Storage Support<sup>[1]</sup>

One drive, up to 1TB M.2 2242 SSD

Storage Slot<sup>[2]</sup>

One M.2 2280 PCIe® 3.0 x2 slot

Storage Type\*\*

Disk Type	Interface	Offering
-----------	-----------	----------

M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x4 <sup>[3]</sup>	128GB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4 <sup>[4]</sup>	256GB / 512GB / 1TB

Notes:

- [1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.
- [2] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.  
PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);  
PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);  
PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).
- [3] The SSD with PCIe® 3.0x4 is downgraded to closer to PCIe® 3.0x2 due to the AMD platform limitations.
- [4] The SSD with PCIe® 4.0x4 is downgraded to closer to PCIe® 3.0x2 due to the AMD platform limitations.

Removable Storage

Card Reader

SD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 1.5W x2, Dolby Audio™

Microphone

Dual-microphone array

Camera

HD 720p, with privacy shutter, fixed focus

Battery

Battery

42Wh Rechargeable Li-ion Battery, supports Rapid Charge Boost (get 2 hours of runtime with a 15-minute charge)

Max Battery Life<sup>[1]</sup>

MobileMark® 2018: 9.86 hr  
Local video (1080p) playback@150nits: 17.35 hr

Notes:

- [1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, MobileMark® 30, JEITA 2.0, JEITA 3.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter

65W round tip (3-pin) AC adapter, 100-240V, 50-60Hz

DESIGN

Display

Display\*\*

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)
15.6"	HD (1366x768)	Non-touch	TN	220nits	Anti-glare	16:9	400:1	45% NTSC	45° / 45° / 15° / 35°
15.6"	FHD (1920x1080)	Non-touch	TN	220nits	Anti-glare	16:9	400:1	45% NTSC	45° / 45° / 15° / 35°

15.6"	FHD (1920x1080)	Multi-touch	IPS <sup>[1]</sup>	300nits	Anti-glare	16:9	800:1	45% NTSC	85° / 85° / 85° / 85°
15.6"	FHD (1920x1080)	Non-touch	IPS <sup>[2]</sup>	250nits	Anti-glare	16:9	700:1	45% NTSC	80° / 80° / 80° / 80°

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Screen-to-Body Ratio

87% AAR (active area ratio)

Notes:

[1], [2] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Pen

No support

Keyboard

6-row, multimedia Fn keys, numeric keypad

Keyboard Backlight

Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 69 x 104 mm (2.72 x 4.09 inches)

Mechanical

Dimensions (WxDxH)<sup>[1]</sup>

360.2 x 236 x 17.9 mm (14.18 x 9.29 x 0.70 inches)

Weight<sup>[2]</sup>

Starting at 1.58 kg (3.48 lbs)

Case Color<sup>\*\*</sup>

- Abyss blue
- Cloud grey
- Sand

Case Material

PC-ABS (top), PC-ABS (bottom)

Surface Treatment

IMR (in-mold decoration by roller)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth<sup>®\*\*[1]</sup>

- Wi-Fi<sup>®</sup> 5, 802.11ac 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.1, M.2 card
- Wi-Fi<sup>®</sup> 6, 802.11ax 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.2, M.2 card<sup>[2]</sup>

WWAN

No support

Ethernet

No onboard Ethernet

---

Notes:

[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2] Wi-Fi® 6 operation is subject to the regulation rules in each country.

## Ports<sup>[1]</sup>

### Standard Ports

- 1x USB 2.0
- 1x USB 3.2 Gen 1
- 1x USB-C® 3.2 Gen 1 (support data transfer only)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Card reader
- 1x Power connector

---

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

## SECURITY & PRIVACY

### Security

#### Security Chip

Firmware TPM 2.0 integrated in SoC

#### Fingerprint Reader

- Touch style fingerprint reader integrated in power button
- No fingerprint reader

#### BIOS Security

- Administrator password
- Hard disk password
- Power-on password
- Self-healing BIOS

#### Other Security

Camera privacy shutter

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year mail-in service
- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 2-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) courier or carry-in service

## ACCESSORIES

### Bundled Accessories

**Bundled Accessories<sup>[1]</sup>**

- Lenovo® 15.6" laptop casual toplayer, polyester, black
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for IdeaPad® 1 15AMN7](#).

## OPERATING REQUIREMENTS

### Operating Environment

**Temperature<sup>[1]</sup>**

- At altitudes up to 2438 m (8,000 ft)
  - Operating: 5°C to 35°C (41°F to 95°F)
  - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
  - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

**Relative Humidity**

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

**Altitude**

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

**Green Certifications<sup>[2]</sup>**

- ENERGY STAR® 9.0
- ErP Lot 3
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] ENERGY STAR® certification is optional and only available on the models with preloaded OS. Please visit [energystar.gov](http://energystar.gov) for more information.

- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD




AMD



AMD



AMD

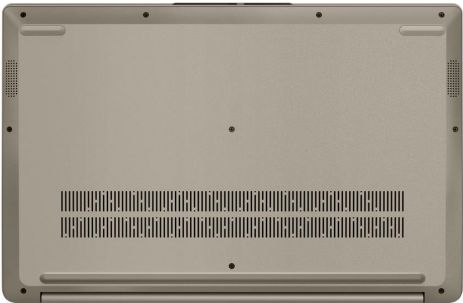

AMD



AMD