
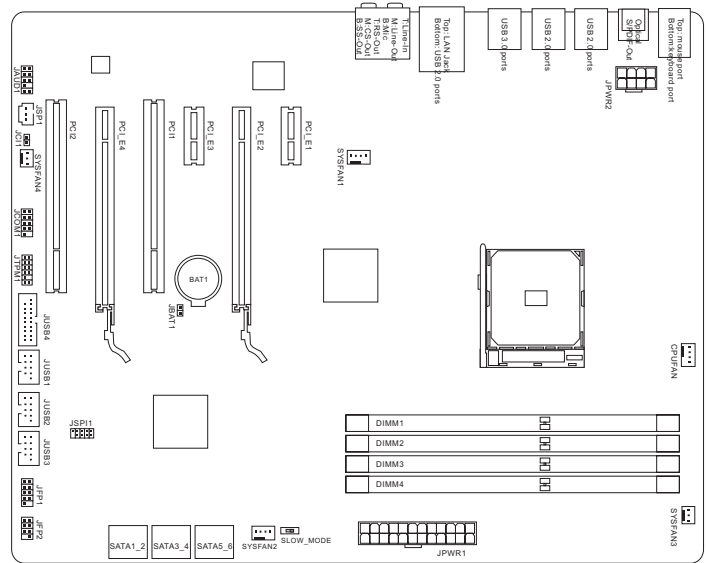


970 GAMING

(MS-7693v4.1)

ATX Motherboard

Supports 64bit AMD® FX, Phenom II X6/X4/X3/X2, Athlon II X4/X3/X2 and Sempron CPU in AM3 / AM3+ package

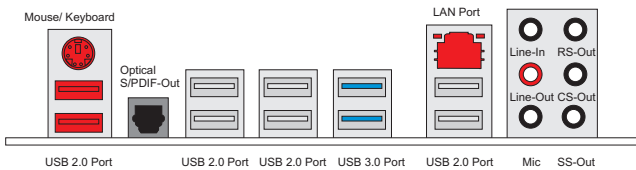

Motherboard Specification

| | |
|--|--|
| <p>Processor Support</p> <ul style="list-style-type: none"> Supports 64bit AMD® FX, Phenom II X6/X4/X3/X2, Athlon II X4/X3/X2 and Sempron CPU in AM3 / AM3+ package <p>Hyper Transport</p> <ul style="list-style-type: none"> Hyper Transport 3.0 up to 4.8 GT/s <p>Chipset</p> <ul style="list-style-type: none"> North Bridge: AMD® 970 chipset South Bridge: AMD® SB950 chipset <p>Memory Support</p> <ul style="list-style-type: none"> DDR3 1066/ 1333/ 1600/ 1866/ 2133(OC) DRAM (32GB Max) 4 DDR3 DIMMs/ 2 channels <p>LAN</p> <ul style="list-style-type: none"> Supports LAN PCI-E Gb LAN (10/100/1000) by Killer E2205 <p>Audio</p> <ul style="list-style-type: none"> HD Audio Realtek® ALC1150 Up to 8-channel audio with jack sensing <p>SATA</p> <ul style="list-style-type: none"> 6 SATA 6Gb/s (SATA1~6) ports by AMD SB950 <p>USB 3.0</p> <ul style="list-style-type: none"> 4 USB3.0 ports by VIA B02-VL8060C-V01 | <p>Connectors</p> <ul style="list-style-type: none"> Back panel <ul style="list-style-type: none"> 1 PS/2 mouse/ keyboard port 8 USB 2.0 ports 2 USB 3.0 ports 1 Optical S/PDIF-Out 1 LAN port 6 flexible audio jacks On-Board Connectors <ul style="list-style-type: none"> 3 USB 2.0 connectors 1 USB 3.0 connector 1 Chassis Intrusion connector 1 Front Panel Audio connector 1 TPM Module connector 1 Serial port connector 1 Clear COMS <p>Slots</p> <ul style="list-style-type: none"> 2 PCI Express x16 slots 2 PCI Express x1 slots 2 PCI slots, Support 3.3V/ 5V PCI bus Interface <p>Form Factor</p> <ul style="list-style-type: none"> ATX (304.8 mm x 243.8 mm) <p>Feature on Focus</p> <ul style="list-style-type: none"> Active Phase Switch feature to save power dynamically BIOS code unlocked technology CrossFireX™ M-Flash included SATA 6Gb/s USB 3.0 <p>Mounting</p> <ul style="list-style-type: none"> 9 mounting holes |
|--|--|

These specification is subject to change without prior notice.